

Dicor Seamless EPDM Roofing System featuring Brite-Ply™ Membrane by

CARLISLE

Carlisle SynTec Incorporated




- First choice on today's new RV's
- Well suited for retrofit installations
- Requires less lifetime maintenance
- Saves energy by reflecting heat
- Eliminates irritating roof rumble
- 12 year manufacturer's guarantee

*The most technically advanced
EPDM Rubber Roofing product
on the market today!*

dicor

Dicor's Three-Part System has Distinct Advantages

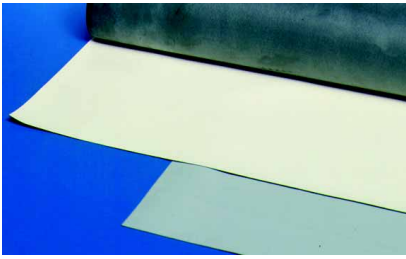

1. Rubber Roofing

Brite-Ply® EPDM Rubber Roofing assures a watertight roof that is easy to maintain and saves energy through its heat reflecting characteristics. It is highly puncture resistant, has superior tensile strength and tear resistance, and is both reflective and refractive to UV rays. **The Brite-Ply® Membrane** resists uneven weathering, fading or chalkiness of the installed roofing system. It passes the ASTM 20 year accelerated aging test with no discoloration.

2. Water Based Bonding Adhesive

This **Water Based Acrylic Bonding Adhesive** is environmentally and user safe. This special formulation provides the user with longer open time for installation as well as numerous re-tack opportunities. It provides excellent coverage and is easy to apply from either 1 or 5 gallon pails. **Note:** This product is designed for use on moisture absorbent substrates and **not** on metal or fiberglass. Also not to be used to bond rubber to rubber.



3. Lap Sealant

The third part of the Dicor system is the **Lap Sealant** which creates a watertight seal along the roof's edges, around air vents, vent pipes, air conditioners and screw heads. Compatible with EPDM sheeting, it offers excellent adhesion to aluminum, mortar, wood, vinyl, galvanized metal and concrete. It improves the ability to continuously seal and remain flexible. Color matched, the lap sealant is UV stabilized to prevent deterioration and discoloration and will not stain or discolor any material to which it is applied.

Retrofit Installation Materials

EPDM Rubber Roof Membrane

Dicor's White **EPDM Rubber Roofing Membrane** is available for retrofit application in 8-1/2 ft. and 9-1/2 ft. widths in lengths of 21 to 40 feet.



Installation Component Kit

The **Installation Component Kit** includes two gallons of water based bonding adhesive, 150 ft. of butyl tape used to seal around all the accessories and molding, and six tubes of lap sealant. Each kit comes with a warranty card and easy to follow instructions.

Dicor also distributes a complete line of Rubber Roof Care and Maintenance products.

